

550,428



PCT

(10) International Publication Number
WO 2004/085277 A1

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:
— *of inventorship (Rule 4.17(iv)) for US only*

Published:
— *with international search report*

[Continued on next page]


**(71) Applicant (for all designated States except US): CAS-
TROL LIMITED [GB/GB]; Wakefield House, Pipers
Way, Swindon, Wiltshire SN3 1RE (GB).**

(72) Inventor; and

(75) **Inventor/Applicant (for US only):** MISHRA, Prabhat, Ranjan [IN/GB]; 20 Contemporis, 10 Merchants Road, Bristol BS8 4HB (GB).

(74) Agent: PERKINS, Nicholas, David; BP International Limited, Chertsey Road, Sunbury-on-Thames, Middlesex TW16 7LN (GB).

(54) Title: CLOSURE FOR A CONTAINER

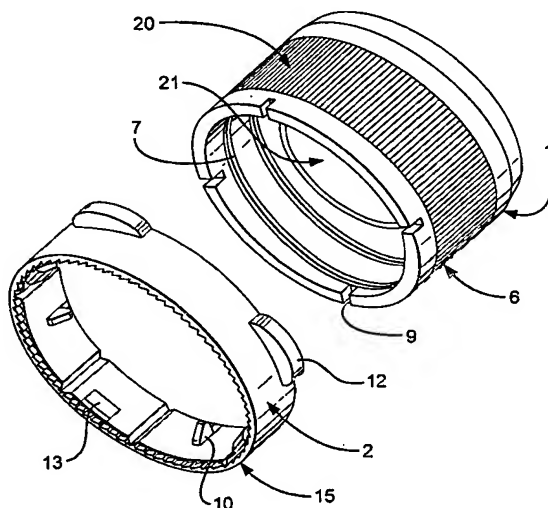

(57) Abstract: A closure for a container which comprises a cap (1) and a locking ring (2), the cap being adapted in use to sealably engage the opening (3) of the outlet neck (4) of a container (5); and the locking ring being adapted in use to be mounted over the outlet neck of the container and slidable between first and second positions, such that in use in the first position, the locking ring engages the cap and thereby prevents disengagement of the cap from the opening of the container and in the second position, the locking ring is (a) disengaged from the cap thereby allowing the cap to disengage the opening of the outlet neck and (b) retained in the second position on the outlet neck of the container.

WO 2004/085277 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.